

KEYENCE

NEW Vision Sensor
IV-H Series

EtherNet/IP™

PROFI
NET

CE  **UL** **US**
LISTED



RAPID SET-UP

A VISION SENSOR THAT ANYONE CAN USE

NEW INSPECTION TOOLS FOR GREATER FLEXIBILITY


Intelligent sensor
I-SERIES

IV-H Series

NOT INSPECTING POINTS, BUT THE ENTIRE SURFACE


Detects regardless of part position variations

With the position adjustment function, simply place the target anywhere within the field of view for detection with no errors in judgment.

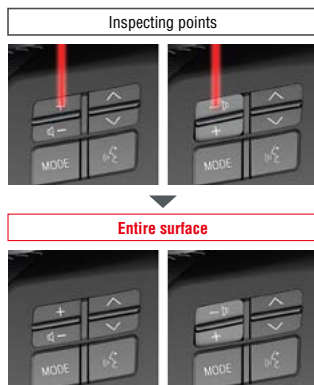


A single unit can be used for multiple inspections

Up to 16 inspection tools can be utilized for each captured image.

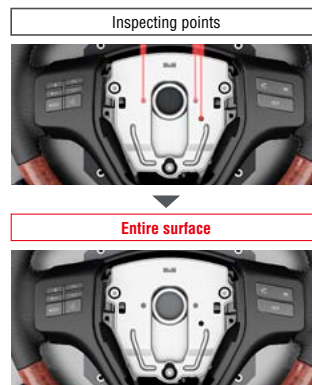

Can be used for difficult-to-detect targets

The vision sensor can detect parts for which detection was difficult with previous sensors, such as parts with irregular color patterns.

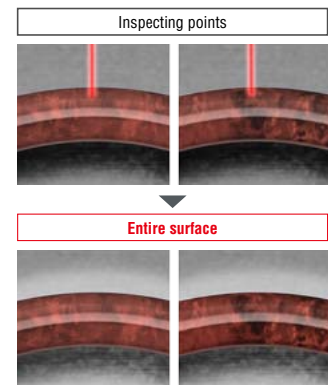

VISION SENSOR

FOR PRESENCE DETECTION

NEW IDEAS FOR HANDLING DIFFICULT DETECTION

EASY TO USE RAPID SET-UP

Setup can be completed in approximately 1 minute thanks to “Easy Navigation”.

STABLE DETECTION OUTSTANDING IMAGING TECHNOLOGY

Clear images are captured with high-intensity illumination and a high-performance quad lens, which comes standard. In addition, the High Sensitivity - High Dynamic Range function and digital zoom provide even more stable detection.

ULTRA-COMPACT INSTALL ANYWHERE DESPITE MOUNTING RESTRICTIONS

Featuring a lineup that offers the smallest ultra-compact model in its class. This allows for the vision sensor to be installed anywhere, even in narrow spaces.

AFFORDABLY PRICED REDUCE INTRODUCTION COSTS

Choose from 9 different sensor heads to suit your needs.



Intelligent sensor
I-SERIES

SIMPLY EASY RAPID SET-UP

SIMPLE ONE-TOUCH SETUP



AUTOMATIC

BRIGHTNESS ADJUSTMENT

Brightness adjustment is completed with just the press of a button. Thanks to the built-in lighting, which is optimized for stable detection, there is no need to adjust settings such as the lighting type, color, and installation distance. Additionally, fine adjustments requiring advanced imaging skills - such as adjustments to the gain and exposure time - are also automatically optimized.



START

AUTOMATIC

FOCUSING

Focusing is also completed with just one button press. The first-in-class automatic focus mechanism enables high-speed and highly accurate focusing, an operation that conventionally has been done manually while watching the screen.



Approximately 15 seconds

PC SOFTWARE IS AVAILABLE

The IV Series can be set up with an intelligent monitor (IV-M30) or a PC. As PCs can have a larger display, setup procedures are even easier to understand and can be quickly set up by first time users.



JUST OUTLINE

TOOL SETUP

The tool setup, which establishes the detection details, can also be completed intuitively. For shape judgments, the user only has to outline the target. For color judgments, the user only has to touch the target. The IV Series then recognizes and detects the target automatically.



COMPLETE IN 1 MINUTE

The brightness adjustment and focusing are set up automatically with one-touch control, and the inspection tool is set when the user simply selects the target. Therefore, anyone can obtain stable detection without variations arising from differences in experience levels.



Approximately 45 seconds



1 minute


STABLE DETECTION

OUTSTANDING OPTICAL TECHNOLOGY



FIRST-IN-CLASS AUTOMATIC FOCUS

Our first-in-class automatic focus mechanism has evolved even further. We have newly developed this mechanism to be more compact and to have higher accuracy. By combining the automatic focus drive unit with the lens case and then designing them in the optimal manner, our mechanism is 40% more compact than conventional ones. Also, by improving the durability of the drive unit, this compact automatic focus mechanism can operate over a wider range than conventional mechanisms.




LOW DISTORTION

HP-QUAD* LENS


The newly developed lens contains 4 layers of glass that achieve low aberration with high light-gathering power. It captures bright, clear images with low distortion for stable detection.

*High Precision-Quad

The Quad lens captures an image of the entire field of view under uniform conditions.




COMPARISON OF DISTORTION

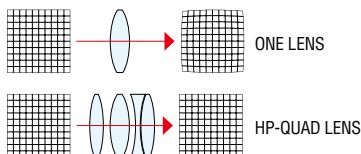


HS-HDR* FUNCTION

Detection is stabilized by widening the light-receiving sensitivity range when a high amount of reflection occurs in the image. Adjustments are made within a single image capture instead of several so that high speed detection is possible.

*High Speed HDR

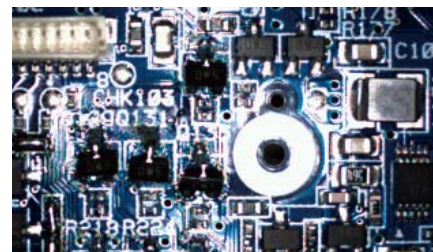

HS-HDR function OFF

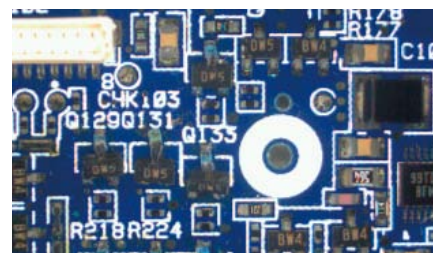


HS-HDR function ON




DIGITAL ZOOM FUNCTION

Use the digital zoom to show any area within the field of view at up to 4x. Whether looking to install further away or choosing to zoom in and capture only the required area for a small target, the digital zoom provides even more stable detection.

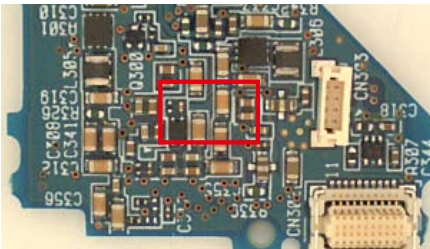

Without digital zoom

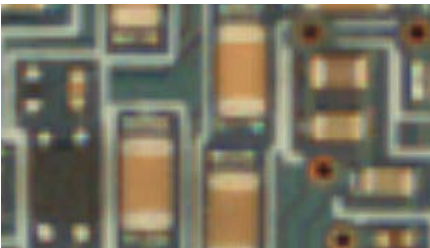

4x digital zoom [IV-HG Series only]

POLARIZED FILTER



Glare from glossy surfaces is reduced because only one direction of the light wave components is transmitted. The compact size enables easy installation.



Without polarized filter



With polarized filter [OP-87436]

DOME LIGHT



Effective in reducing glare. Generating indirect light from various directions ensures the object is uniformly illuminated. No external power supply is necessary, which reduces introduction costs to 1/10th of conventional lights.



Without dome attachment



With dome attachment [IV-D10]


*This method is more effective than a polarization filter at reducing glare.

INSTALL ANYWHERE

ULTRA-COMPACT MODEL THAT IS THE SMALLEST IN ITS CLASS

ULTRA-COMPACT MODEL NEW

INSTALL ANYWHERE WITH MINIMAL SPACE RESTRICTIONS

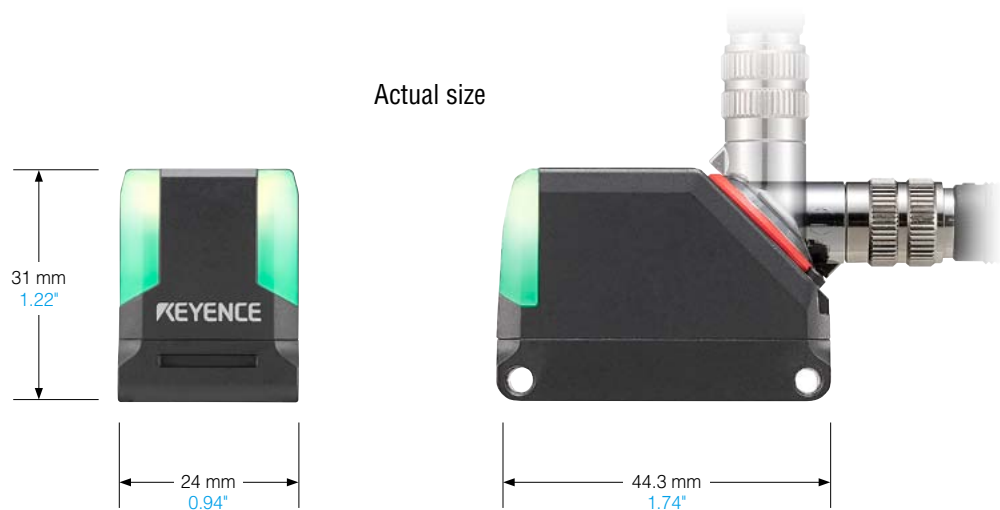

FLEXIBLE LAYOUT A CONNECTOR THAT CAN ROTATE 330°

The cable connector can be rotated by up to 330° to match the available space and installation conditions. Together with the smallest head size in its class, this ensures a high degree of freedom when it comes to installations.

ADJUSTABLE FIELD OF VIEW AND DISTANCE


VAST LINEUP OF SENSOR HEADS

FIELD OF VIEW

WIDE 2.2 times more than conventional models (wide field of view model) **NEW**

WIDE FIELD OF VIEW EVEN AT CLOSE RANGE


Installation distance: The field of view (the longer direction) makes use of a 1:1 wide-angle lens. This expands the size of the field of view to 2.2 times that of the standard sensor model at the same installation distance.

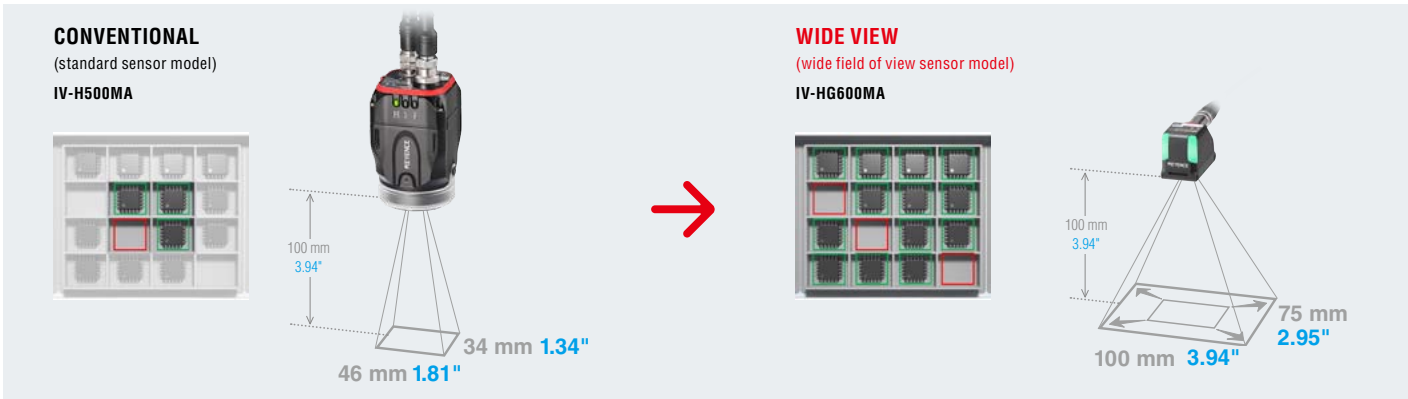

ZOOM 3 times more than conventional models (ultra-narrow field of view model) **NEW**


DETECTS EXTREMELY SMALL TARGETS

The sensor uses a magnifying lens with a minimum field of view of 4 × 3 mm 0.16" × 0.12" (1 × 0.75 mm 0.04" × 0.03" when using the digital zoom). This enables imaging with a zoom that is 3 times the conventional model.

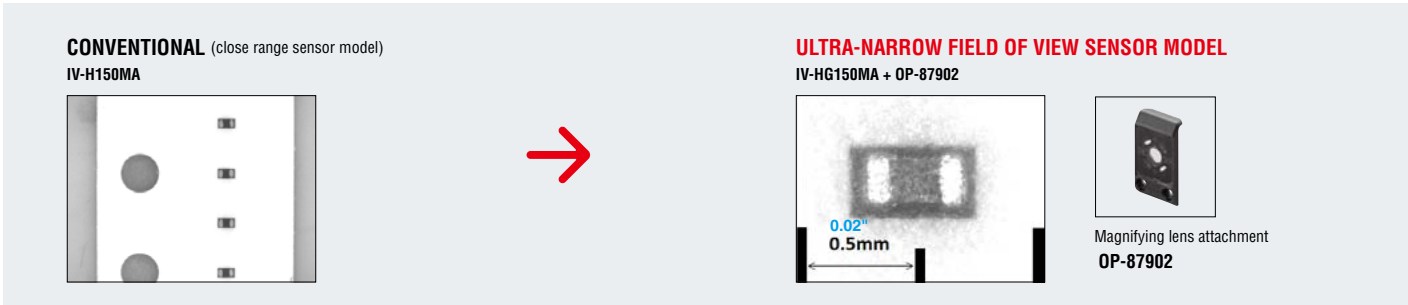

A LINEUP WITH SELECTABLE INSTALLATION DISTANCES

Covers a range up to 111x; from 18 mm 0.71" for close range detection to 2000 mm 78.74" for long distances.

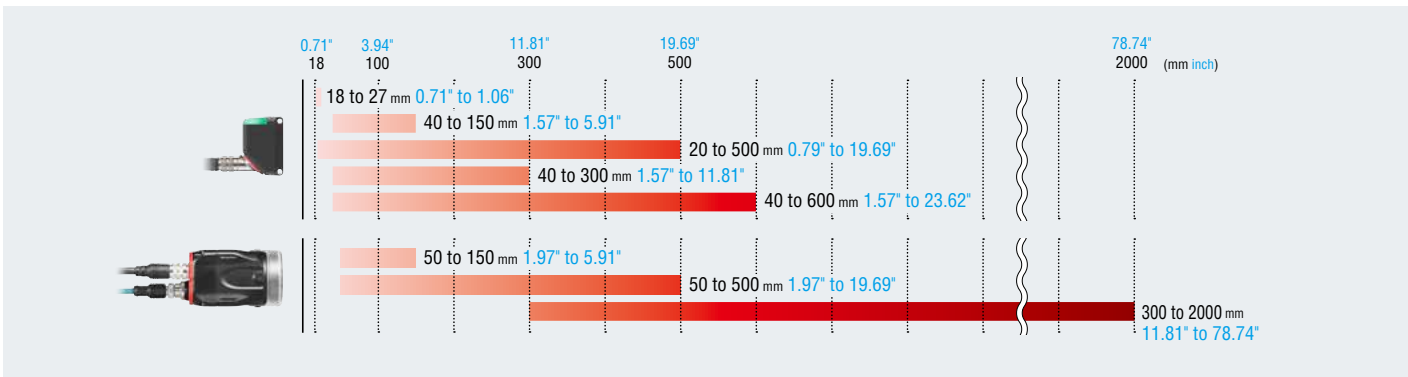


NEWLY DEVELOPED PATTERN TOOL FOR STABLE DETECTION

BASIC TOOLS


SHAPE DETECTION

The match percentage of the object is calculated based on the shape of the registered master image. Brightness differences or differences in individual surface conditions, which were previously difficult to handle with normalized correlation methods (pattern matching) can now be identified.

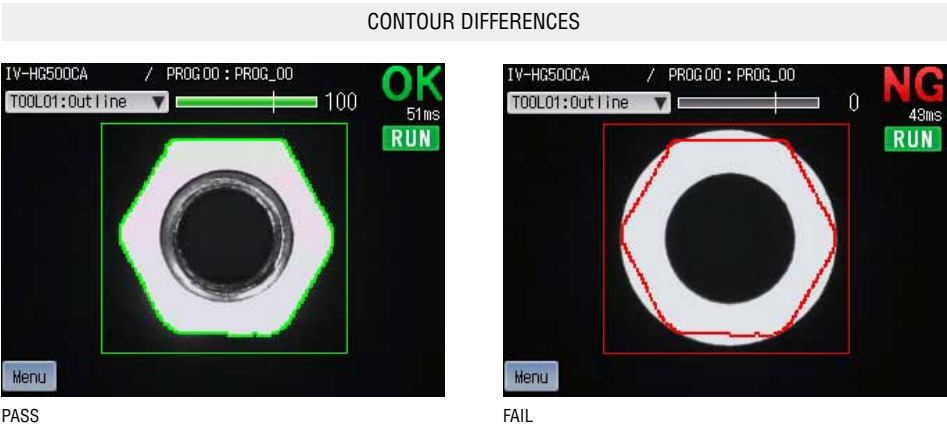

AREA


Using the registered master area (number of pixels) as reference, the difference in area from the inspection object is calculated. When using a color model, judgment can be made based on the desired area of the specified color. When using a monochrome model, brightness is judged by the area binarized in black and white.

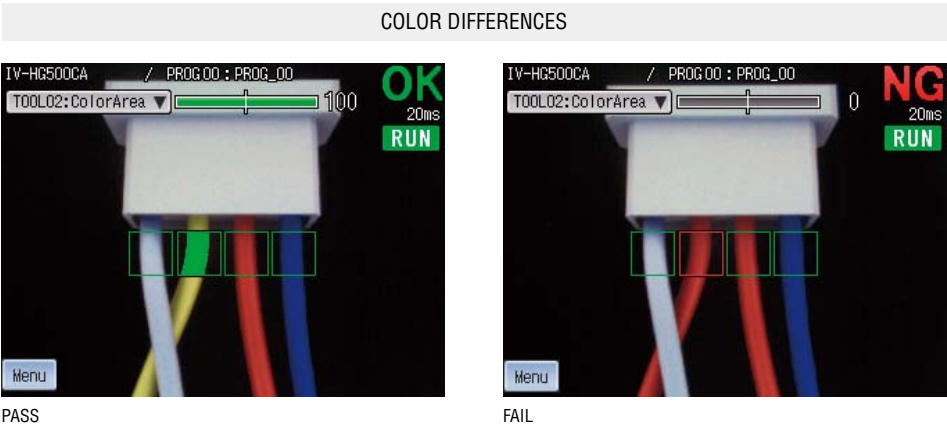


EDGE PIXELS NEW

The match percentage of the object is calculated based on the number of pixels in the edge (outline) of a registered master image. This makes it possible to maintain stable detection when the objects' color is the same but their materials are differing, or when the brightness is changing.

DIFFERENCES IN THE NUMBER OF PIXELS IN AN EDGE

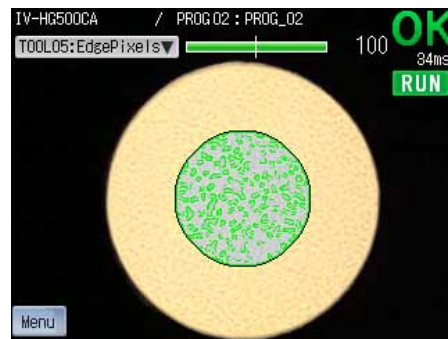

PASS

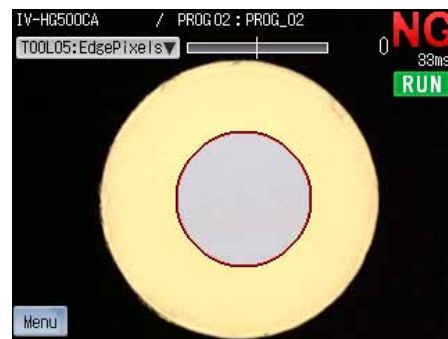

FAIL

POSITION ADJUSTMENT NEW

If the object is misaligned, 100% inspection cannot be achieved because the object may be outside the inspection area. The position adjustment function calculates the amount of misalignment from the master image in order to correct the position, and enable correct judgment. In addition, 360° rotation is supported for high speed tracking. This means you don't need to worry about misalignment of the targets.

DETECTION OF STICKER PRESENCE/ABSENCE BY USING POSITION ADJUSTMENT



PASS



FAIL


NEWLY DEVELOPED PATTERN TOOL FOR STABLE DETECTION

EDGE TOOLS


WIDTH/HEIGHT NEW

Differentiate parts by comparing the width between edges on the target to the width of the registered master image. Using the scaling function to convert the actual values makes it possible to intuitively differentiate between products with different widths.

WIDTH DIFFERENCES

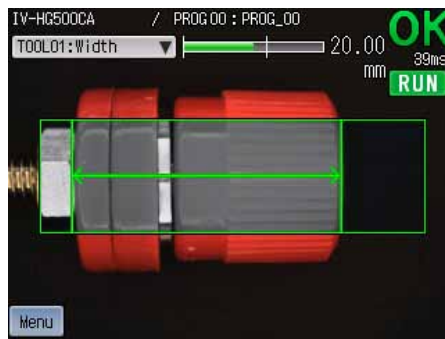

PASS

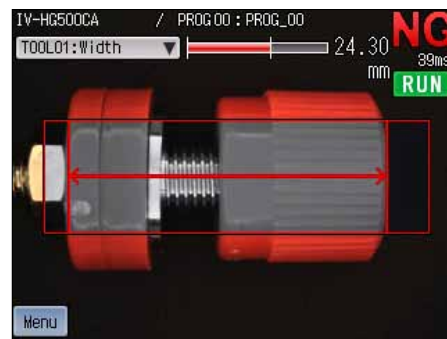


FAIL

DIAMETER NEW

Differentiate parts by comparing the diameter of the target to the diameter of the registered master image. Even if there is more than one diameter in the inspection area, selecting the diameter to be inspected is simple.

DIAMETER DIFFERENCES

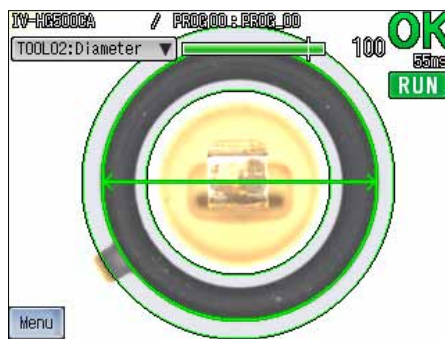


PASS



FAIL


EDGE PRESENCE NEW

Differentiate parts by comparing the number of edges on the target to the number of edges in the registered master image. This allows for even faster and simpler edge count differentiation compared to using the outline tool.

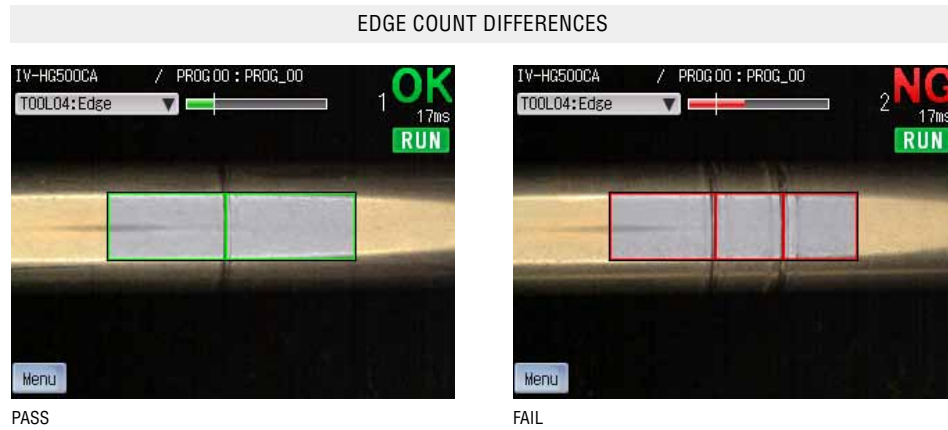

PITCH NEW


Differentiate parts by comparing the pitch width of the target to that of the registered master image. In addition, checking the pitch count is possible, allowing for not only differentiation of product types but also simple inspections for missing or bent pins.

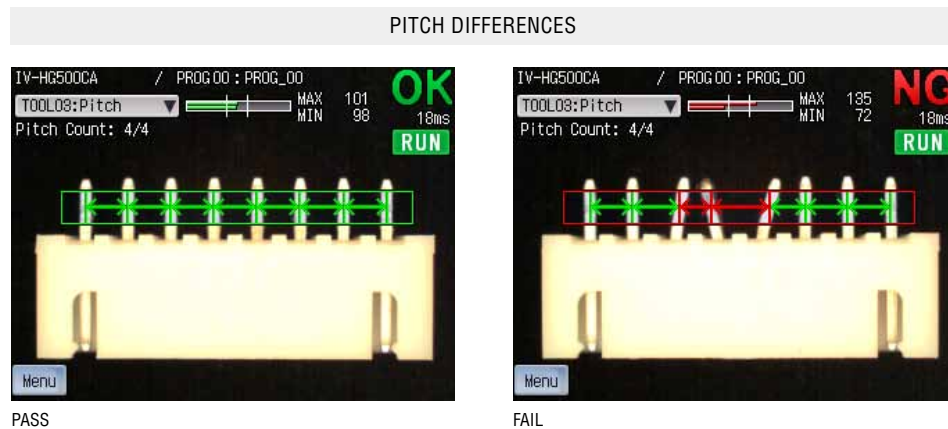

EXTENSIVE PC SOFTWARE AT AN AFFORDABLE PRICE


SOFTWARE FOR IV SERIES, “IV-Navigator” IV-H1

The IV Series can be set up with an intelligent monitor (IV-M30) or a PC. As PCs can have a larger display, setup procedures are even easier to understand and can be quickly set up by first time users.

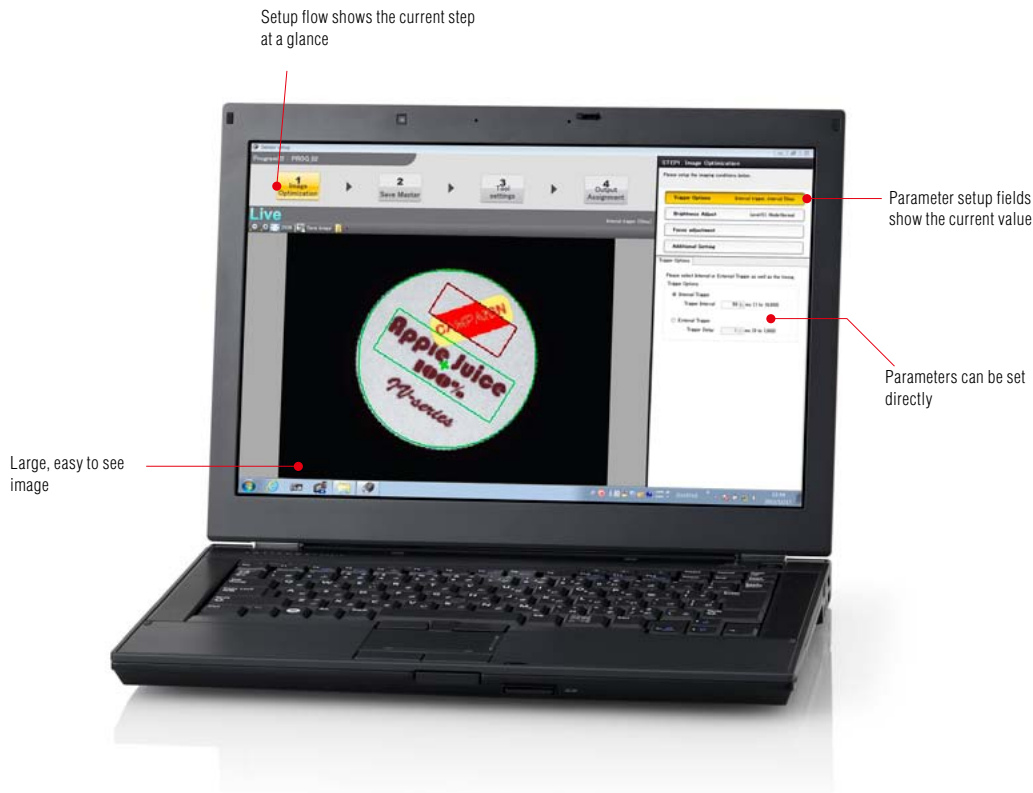

SIMULATION FUNCTION


This function allows you to check and modify the program configurations and perform operation simulations based on the image history without connecting the sensor. This enables easy computation of the optimal thresholds while looking at the detection result statistics and histogram, even when you are away from the actual worksite.

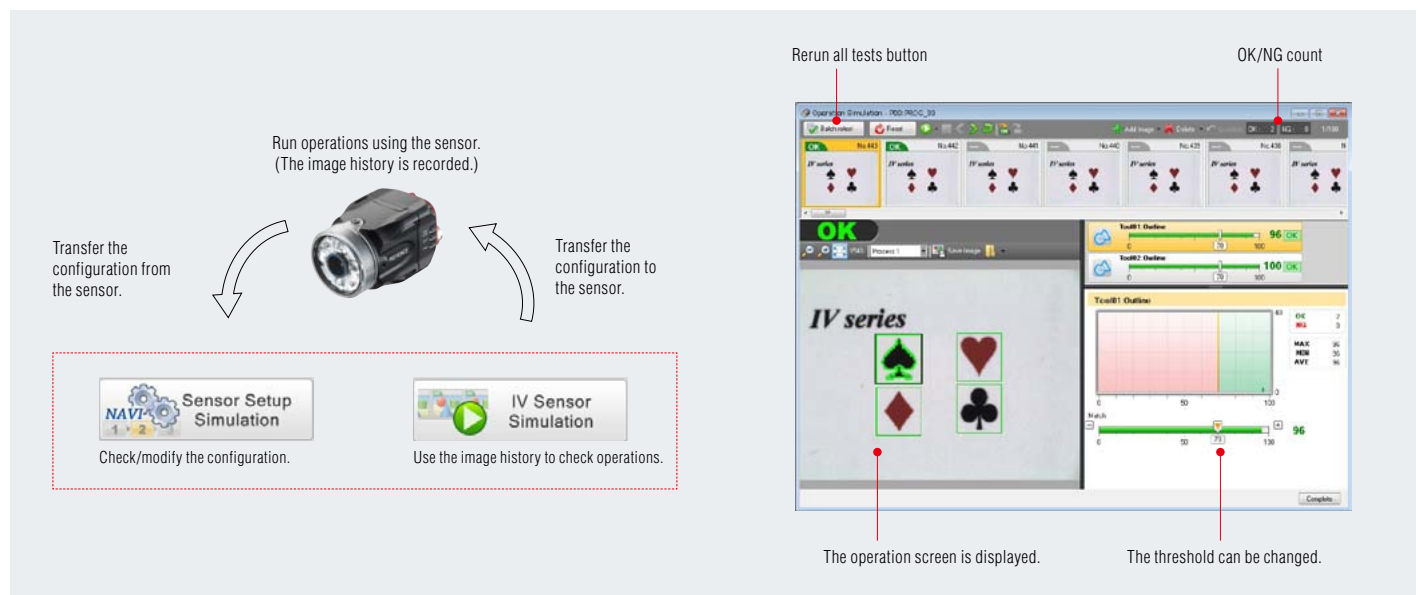

SIMPLE OUTPUT AND COMMUNICATION

OUTPUT SPECIFICATIONS THAT SUPPORT ALL CONNECTED DEVICES

Up to 16 detection results can be freely combined to match the output destination and the usage conditions. The sensor can easily be attached to existing equipment and a PLC is not required. Also, the FTP client function supports image saving and global communication standards.

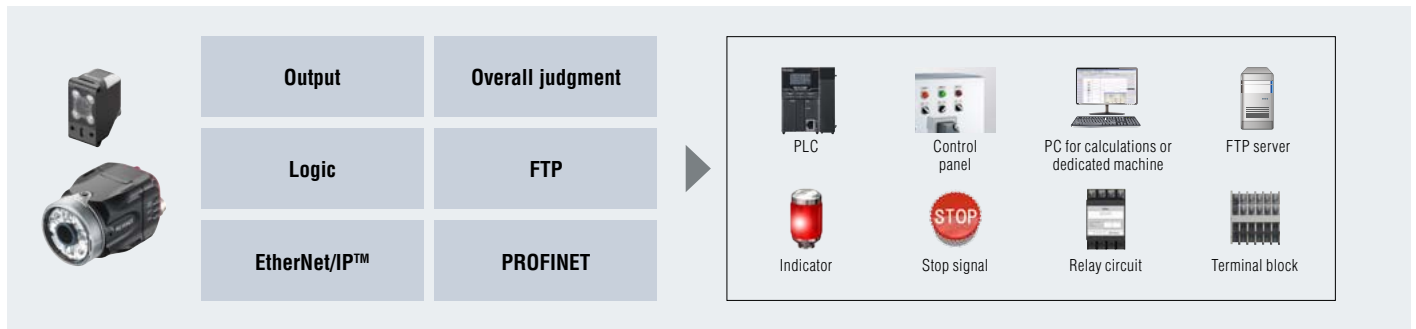


SIMPLE CONNECTION FUNCTION

TRACEABILITY SUPPORT

FTP CLIENT AND DATE/TIME SYNCHRONIZATION FUNCTIONS **NEW**


Image files from the sensor can be automatically transferred to an FTP server or a PLC using the FTP client function. Additionally, the date/time synchronization function offers verification of an image's capture date and time. To meet the increasing interest in traceability, these functions allow either all images or just images of unacceptable products to be saved for further analysis of these products.

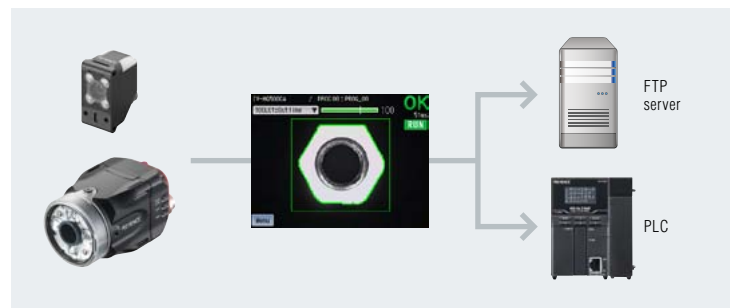

REQUIRES NO INITIAL SETUP FOR REMOTE OPERATIONS AND NETWORKING:

SIMPLE CONNECTION & SWITCHING FUNCTION

This function makes it easy to switch between sensors without troublesome initial setup such as assigning IP addresses and registering the devices to connect to. The result is major reductions in the initial setup, when operating remotely over Ethernet and when constructing a network with multiple units.

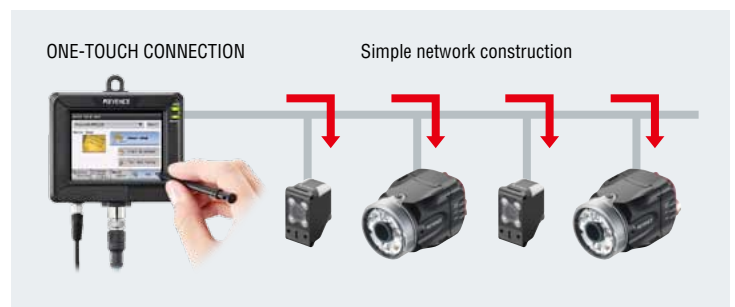


LINEUP CONTAINING 9 MODELS FOR A VARIETY OF SITUATIONS

ULTRA-COMPACT MODELS NEW

ULTRA-NARROW FIELD OF VIEW SENSOR MODEL (WITH ATTACHMENT)




Monochrome AF type
IV-HG150MA
+
Magnifying lens attachment
OP-87902



NARROW FIELD OF VIEW SENSOR MODEL




Monochrome AF type
IV-HG150MA



STANDARD SENSOR MODEL




Color AF type
IV-HG500CA
Monochrome AF type
IV-HG500MA



WIDE FIELD OF VIEW SENSOR MODEL (COLOR)




Color AF type
IV-HG300CA



WIDE FIELD OF VIEW SENSOR MODEL (MONOCHROME)



Monochrome AF type
IV-HG600MA

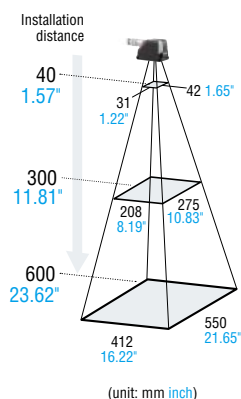

AF...Automatic focus model


*View and optical axis has individual differences.

STANDARD MODELS

CLOSE RANGE SENSOR MODEL




Monochrome AF type
IV-H150MA



STANDARD SENSOR MODEL




Color AF type
IV-H500CA
Monochrome AF type
IV-H500MA

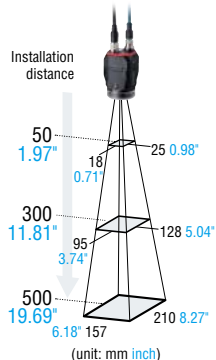

LONG RANGE SENSOR MODEL




Monochrome AF type
IV-H2000MA


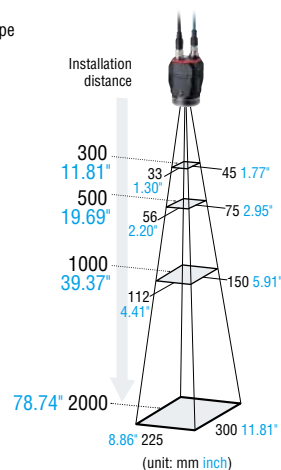


SYSTEM CONFIGURATION OF A STANDARD OR ULTRA-COMPACT HEAD MODEL


ULTRA-COMPACT MODEL NEW

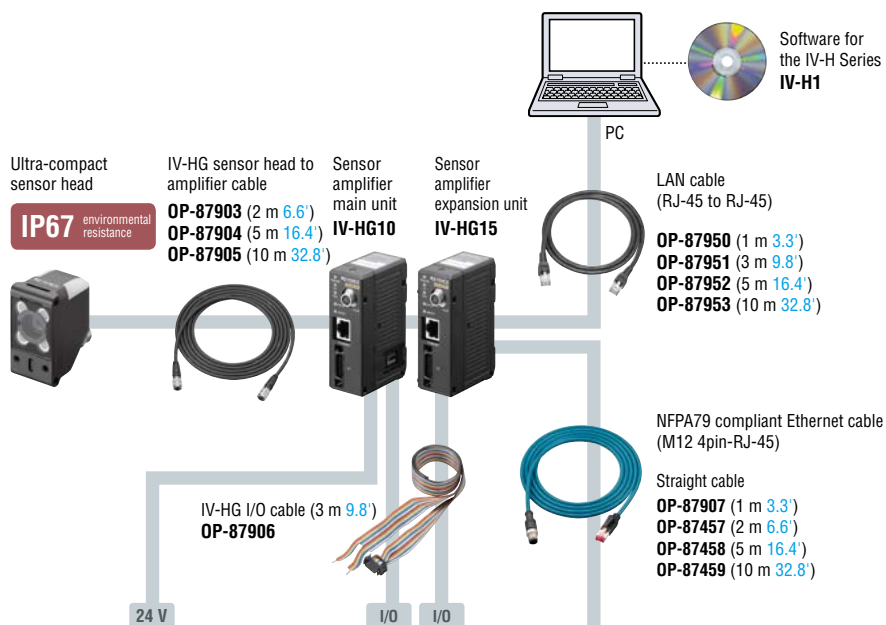


MONITOR

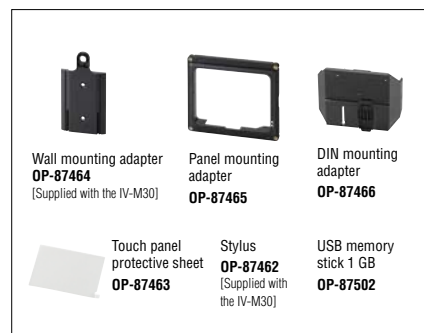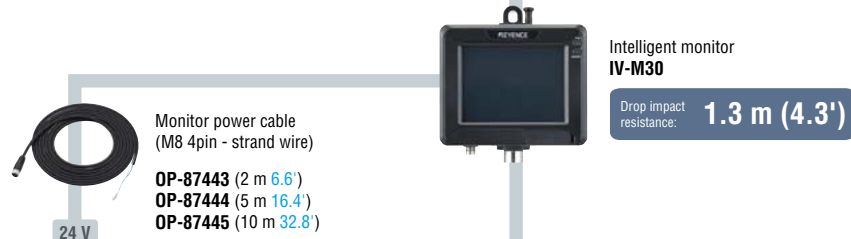


STANDARD MODEL

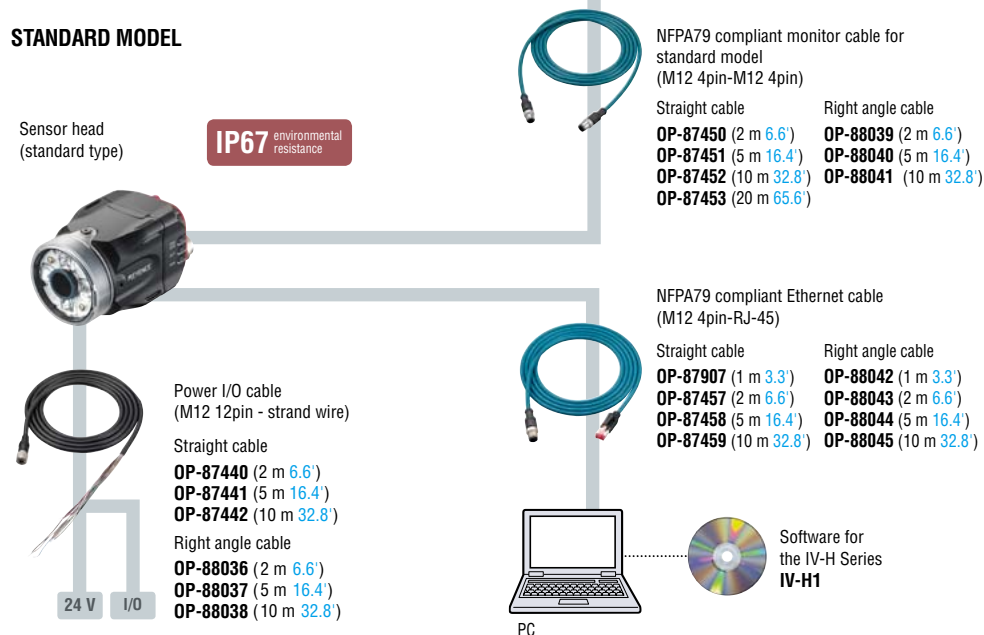


AUTOMOTIVE & METAL

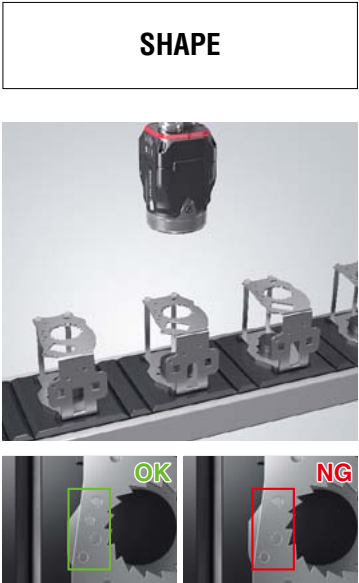



FOOD & PHARMACEUTICAL

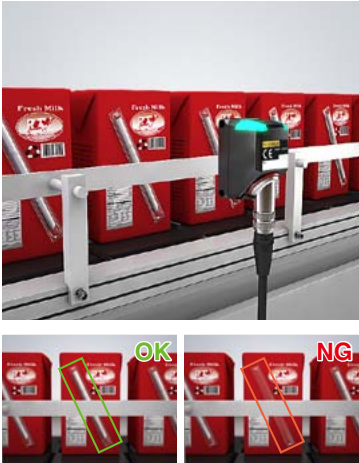



ELECTRIC & ELECTRONIC

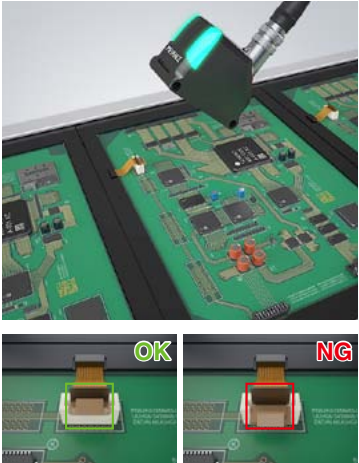


WIDTH & HEIGHT

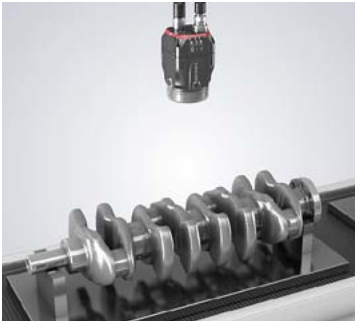


DIAMETER, PITCH & EDGE PRESENCE

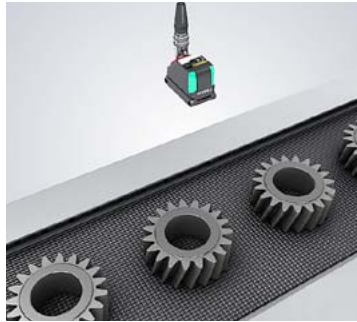



WIDE FOV & SPACE-SAVING

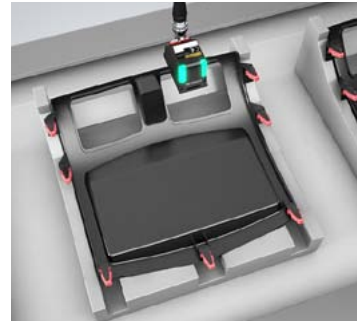

AUTOMOTIVE & METAL



FOOD & PHARMACEUTICAL



ELECTRIC & ELECTRONIC

Sensor Head

Model		IV-HG500CA		IV-HG500MA	IV-HG150MA	IV-HG300CA	IV-HG600MA
Type		Standard sensor model			Narrow field of view sensor model	Wide field of view sensor model	
Installed distance		20 to 500 mm 0.79" to 19.69"			40 to 150 mm 1.57" to 5.91"	40 to 300 mm 1.57" to 11.81"	40 to 600 mm 1.57" to 23.62"
View		Installed distance 20 mm 0.79": 10 (H) × 7.5 (V) mm 0.39" (H) × 0.30" (V) to Installed distance 500 mm 19.69": 200 (H) × 150 (V) mm 7.87" (H) × 5.91" (V)			Installed distance 40 mm 1.57": 8 (H) × 6 (V) mm 0.32" (H) × 0.24" (V) to Installed distance 150 mm 5.91": 32 (H) × 24 (V) mm 1.26" (H) × 0.94" (V)*1	Installed distance 40 mm 1.57": 42 (H) × 31 (V) mm 1.65" (H) × 1.22" (V) to installed distance 300 mm 11.81": 275 (H) × 206 (V) mm 10.83" (H) × 8.11" (V)	Installed distance 40 mm 1.57": 42 (H) × 31 (V) mm 1.65" (H) × 1.22" (V) to installed distance 600 mm 23.62": 550 (H) × 412 (V) mm 21.65" (H) × 16.22" (V)
Image sensor		1/3 inch color CMOS		1/3 inch monochrome CMOS	1/3 inch monochrome CMOS	1/3 inch color CMOS	1/3 inch monochrome CMOS
Pixel		752 (H) × 480 (V)					
Focus adjustment		Auto*2					
Exposure time		1/10 to 1/50000			1/20 to 1/50000	1/25 to 1/50000	1/50 to 1/50000
Lights		Illumination		White LED		Infrared LED	
Lighting method		Pulse lighting/DC lighting is switchable				Pulse lighting	
Indicators		2 (the same display details for both indicators)					
Environmental resistance		Ambient temperature		0 to +50°C 32 to 122°F (No freezing)			
		Relative humidity		35 to 85% RH (No condensation)			
		Vibration*3		10 to 55 Hz, 1.5 mm 0.06" double amplitude, 2 hours each for X, Y, and Z axes			
		Shock resistance*3		500 m/s² 6 different directions in 3 times			
		Enclosure rating*4		IP67			
Material		Main unit case: Zinc die-casting, Front cover: Acrylic (hard coat), Operation indicator cover: TPU					
Weight		Approx. 75 g					

*1. Installed distance 18 mm **0.71"**: 4 (H) × 3 (V) mm **0.16" (H) × 0.12" (V)** to installed distance 27 mm **1.06"**: 7 (H) × 5.2 (V) mm **0.28" (H) × 0.20" (V)** when the magnifying lens attachment (OP-87902) is used

*2. The focusing position can be automatically adjusted at the time of installation. Deactivated during the operation. Focusing position can be registered by program

*3. Except when IV-HG dome attachment (IV-GD05/IV-GD10) is mounted

*4. Except when polarized filter attachment (OP-87899/OP-87900/OP-87901/OP-87902) is mounted

Sensor Amplifier

Model		IV-HG10 (main unit)	IV-HG15 (expansion unit)
Tools	Type	Shape Detection, Area*1, Color Area*2, Edge Pixels, Width/Height, Diameter, Edge Presence, Pitch, Position Adjustment, High Speed Position Adjustment (1-Axis/2-Axis Adjustment)	
	Number*3	Detection tools: 16 tools, position adjustment tool: 1 tool	
Switch settings (programs)		32 programs	
Image history*4	Numbers	When using a color type head: 100 images*5, when using a monochrome type head: 300 images*6	
	Condition	NG only/All is selectable	
Analysis information*7		OFF/Statistics/Histograms/Matching rate list is switchable Statistics: Processing time (latest value, MAX, MIN, AVE), number of OKs, number of NGs, trigger numbers, trigger errors, judgment results list by tools Histograms: Histogram, matching degree (latest value, MAX, MIN, AVE), numbers of OKs, numbers of NGs Matching rate list: Judgment results list by tools, matching rate list by tools, judgment bar list by tools	
Other functions		HDR, HighGain, Color filters*2, Digital zoom (2×, 4×)*8, Brightness correction, Tilt correction, White balance*2, Mask function, Color histogram, Test run, ToolAutoTune, Input monitor, Output test, Security settings, Simulator, Mutual interference prevention, Direct connection (2 units or more), Sensor date/time information addition, Scaling function, Failing sensor list, Failure hold	
Indicators		PWR/ERR, OUT, TRIG, STATUS, LINK/ACT	
Input		Non-voltage input/voltage input is switchable	
		For non-voltage input: ON voltage 2 V or lower, OFF current 0.1 mA or lower, ON current 2 mA (short circuit)	
		For voltage input: Maximum input rating 26.4 V, ON voltage 18 V or higher, OFF current 0.2 mA or lower, ON current 2 mA (for 24 V)	
	Inputs	6 inputs (IN1 to IN6)	
	Function	IN1: External trigger, IN2 to IN6: Enable by assigning the optional functions Assignable functions: Program switching, Clear error, External master image registration, Main unit/expansion unit simultaneous input	
Output		Open collector output NPN/PNP is switchable, N.O./N.C. is switchable	
		For open collector NPN output: Maximum rating 26.4 V 50 mA (20 mA when linked to an expansion unit [IV-HG15]), remaining voltage 1.5 V or lower	
		For open collector PNP output: Maximum rating 26.4 V 50 mA (20 mA when linked to an expansion unit [IV-HG15]), remaining voltage 2 V or lower	
	Outputs	8 outputs (OUT1 to OUT8)	
	Function	Enable by assigning the optional functions Assignable functions: Total judgment result, RUN, BUSY, Error, Position adjustment result, Judgment result of each tool, Result of the logical operation of each tool, Main unit/expansion unit logical output	
Ethernet*9	Standard	100BASE-TX/10BASE-T	
	Connector	RJ-45 8pin connector	
Network function		FTP client, EtherNet/IP™, PROFINET	
Rating	Power voltage	24 VDC ±10% (including ripple)	
	Current consumption	0.8 A or less: 1.5 A or less when also using an expansion unit (IV-HG15). (The output load is excluded.)	
Environmental resistance	Ambient temperature	0 to +50°C 32 to 122°F (No freezing)*10	
	Relative humidity	35 to 85% RH (No condensation)	
Material		Main unit case: Polycarbonate	
Weight		Approx. 150 g	

*1. Monochrome type only

*2. Color type only

*3. Tools can be installed by programs.

*4. Saves to the sensor amplifier's internal memory. The images saved to the sensor amplifier can be backed up to the USB memory device inserted into the intelligent monitor (IV-M30) or to the PC by the software for the IV-H/IV-HG Series (IV-H1).

*5. When using the FTP client function: 70 pictures

*6. When using the FTP client function: 210 pictures

*7. This can be displayed on the intelligent monitor (IV-M30) or by software for the IV-H/IV-HG Series (IV-H1).

*8. Possible with both the color type and monochrome type

*9. This is for connection with the intelligent monitor (IV-M30) or software for the IV-H/IV-HG Series (IV-H1).

*10. When attaching the sensor amplifier to a DIN rail, attach the sensor amplifier to a metal plate.

Sensor

Model		IV-H500CA	IV-H500MA	IV-H150MA	IV-H2000MA
Type		Standard distance		Short range	Long range
Installed distance		50 to 500 mm 1.97" to 19.69"		50 to 150 mm 1.97" to 5.91"	300 to 2000 mm 11.81" to 78.74"
View		Installed distance 50 mm 1.97": 25 (H) × 18 (V) mm 0.98" (H) × 0.71" (V) to installed distance 500 mm 19.69": 210 (H) × 157 (V) mm 8.27" (H) × 6.18" (V)		Installed distance 50 mm 1.97": 12 (H) × 9 (V) mm 0.47" (H) × 0.35" (V) to installed distance 150 mm 5.91": 36 (H) × 27 (V) mm 1.42" (H) × 1.06" (V)	Installed distance 300 mm 11.81": 45 (H) × 33 (V) mm 1.77" (H) × 1.30" (V) to installed distance 2000 mm 78.74": 300 (H) × 225 (V) mm 11.81" (H) × 8.86" (V)
Image sensor		1/3 inch color CMOS	1/3 inch monochrome CMOS		
Pixel		752 (H) × 480 (V) 29.61"(H) × 18.90"(V)			
Focus adjustment		Auto*1	Auto*1	Auto*1	Auto*1
Exposure time		1/10 to 1/50000	1/10 to 1/25000	1/20 to 1/25000	1/10 to 1/25000
Lights		Illumination	White LED	Red LED	Infrared LED
Lighting method		Pulse lighting/DC lighting is switchable			
Tools		Type	Shape Detection, Color Area*7, Area*8, Edge Pixels, Width/Height, Diameter, Edge Presence, Pitch, Position Adjustment, High Speed Position Adjustment (1-Axis/2-Axis Adjustment)		
Number*2		Detection tools: 16 tools, position adjustment tool: 1 tool			
Switch settings (programs)		32 programs			
Image history*3		Numbers	100 images*4	300 images*5	
Condition		NG only/All is selectable			
Analysis information*6		OFF/Statistics/Histograms/Matching rate list is switchable Statistics: Processing time (latest value, MAX, MIN, AVE), number of OKs, number of NGs, trigger numbers, trigger errors, judgment results list by tools Histograms: Histogram, matching degree (latest value, MAX, MIN, AVE), numbers of OKs, numbers of NGs Matching rate list: Judgment results list by tools, matching rate list by tools, judgment bar list by tools			
Other functions		HDR, HighGain, Color filters*7, Digital zoom*8, Brightness correction, Tilt correction, White balance*7, Mask function, Color histogram, Test run, ToolAutoTune, Input monitor, Output test, Security settings, Simulator*9, Sensor date/time information addition, Scaling function, Failing sensor list, Failure hold			
Indicators		PWR/ERR, OUT, TRIG, STATUS, LINK/ACT			
Input		Non-voltage input/voltage input is switchable For non-voltage input: ON voltage 2 V or lower, OFF current 0.1 mA or lower, ON current 2 mA (short circuit) For voltage input: Maximum input rating 26.4 V, ON voltage 18 V or higher, OFF current 0.2 mA or lower, ON current 2 mA (for 24 V)			
Inputs		6 inputs (IN1 to IN6)			
Function		IN1: External trigger, IN2 to IN6: Enable by assigning the optional functions Assignable functions: Program switching, Clear error, External master image registration			
Output		Open collector output NPN/PNP is switchable, N.O./N.C. is switchable For open collector NPN output: Maximum rating 26.4 V 50 mA, remaining voltage 1.5 V or lower For open collector PNP output: Maximum rating 26.4 V 50 mA, remaining voltage 2 V or lower			
Outputs		4 outputs (OUT1 to OUT4)			
Function		Enable by assigning the optional functions Assignable functions: Total judge result, RUN, BUSY, Error, Position adjustment result, Judge result of each tool, Result of the logical operation of each tool			
Ethernet*10		Standard	100BASE-TX/10BASE-T		
Connector		M12 4pin connector			
Network function		FTP client, EtherNet/IP™, PROFINET			
Rating		Power voltage	24 VDC ±10% (including ripple)		
Current consumption		0.6 A or less			
Environmental resistance		Ambient temperature	0 to +50°C 32 to 122°F (No freezing)		
Relative humidity		35 to 85% RH (No condensation)			
Vibration*11		10 to 55 Hz, 1.5 mm 0.06" double amplitude, 2 hours each for X, Y, and Z axes			
Shock resistance*11		500 m/s² 6 different directions in 3 times			
Enclosure rating*12		IP67			
Material		Main unit case: Aluminium die-casting, Packing: NBR, Front cover: Acrylic, Mounting adapter: POM			
Weight		Approx. 270 g			

*1. The focusing position can be automatically adjusted at the time of installation. Deactivated during the operation. Focusing position can be registered by program. *2. Tools can be installed by programs.

*3. Saves to the memory in the sensor. The images saved in the sensor can be backed up to the USB memory installed to the intelligent monitor (IV-M30) or to the PC by the software for IV (IV-H1).

*4. When using the FTP client function: 70 pictures *5. When using the FTP client function: 210 pictures *6. This can be displayed on the intelligent monitor (IV-M30) or by software for IV (IV-H1). *7. Color type only

*8. Possible with both the color type and monochrome type *9. Simulator can be used with the IV software (IV-H1). *10. This is for connection with the intelligent monitor (IV-M30) or software for IV (IV-H1).

*11. Except when IV-H dome attachment (IV-D10) is mounted *12. Except when polarized filter attachment (OP-87436/OP-87437) is mounted

MONITOR

Model		IV-M30
Display		3.5" TFT color LCD 320 × 240 dot (QVGA)
Backlight	Method	White LED
	Duration	Approx. 50000 hours (25°C 77°F)
Touch panel	Method	Analog resistive
	Actuating force	0.8 N or less
Indicators		PWR, SENSOR
Ethernet*1	Standard	100BASE-TX/10BASE-T
	Connector	M12 4pin connector
Languages		Japanese/English/German/Simplified Chinese/Traditional Chinese/Italian/French/Spanish/Portuguese/Korean
Expanded memory		USB memory*2
Rating	Power voltage	24 VDC ±10% (including ripple)
	Current consumption	0.2 A or lower
Environmental resistance	Ambient temperature	0 to +50°C 32 to 122°F (No freezing)
	Ambient humidity*3	35 to 80% RH (No condensation)
	Vibration	10 to 55 Hz, 0.7 mm 0.03" double amplitude, 2 hours each for X, Y, and Z axes
	Drop impact resistance	1.3 m 4.3' over the concrete (2 times each in the arbitrary direction)
	Enclosure rating	IP40
Material		Polycarbonate
Weight		Approx. 180 g

*1. This is dedicated for connection with IV-Series sensor. *2. Use the KEYENCE recommended product.

*3. If the ambient temperature is over 40°C 104°F, use it in the absolute humidity of 40°C 104°F 80% RH or lower.







SOFTWARE

Model		IV-H1
System requirements	Interface	Equip the Ethernet (100BASE-TX) interface
	OS	Windows 7 Home Premium/Professional/Ultimate*1 Windows XP Professional/Home Edition; either of OS above needs to be pre-installed
	Languages	Japanese/English/German/Simplified Chinese/Traditional Chinese/Italian/French/Spanish/Portuguese/Korean
	Processor	Windows 7: needs to be compliant with system requirements for OS Windows XP: Pentium III or better, Clock speed 1 GHz or faster
	Memory capacity	Windows 7: needs to be compliant with system requirements for OS Windows XP: 512 MB or more (1 GB or more is recommended)
	Required capacity for installation	1 GB or more
	Monitor	Resolution 1024 × 768 pixels or higher, Display Color High Color (16 bit) or higher
	Operating conditions	.NET Framework 4.0 or 4.5 needs to be installed*2



*1. Supported for 32 bit and 64 bit version.

*2. If .NET Framework 4.0 or 4.5 is not installed, this will be automatically installed at the time of IV-H1 installation.


IV-HG500CA/IV-HG500MA/IV-HG150MA/IV-HG300CA/IV-HG600MA



- IV-HG vertical mounting bracket
- OP-87908**

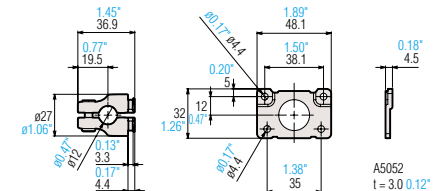

Sensor amplifier expansion unit IV-HG15





Terminal number and wiring color of the I/O cable for IV-HG Series (OP-87906)


Terminal No.	Wiring color	Name	Assigning default value	Description
B1	Brown	OUT1	Total Status (N.O.)	Output assignable function <ul style="list-style-type: none"> • Total Status • Total Status NG • RUN • BUSY • Error • Position Adjustment • Status result of each tool (Tool 1 to 16) • Logical operation result of each tool (Logic 1 to 4) • OFF (not used)
B2	Red	OUT2	BUSY (N.O.)	
B3	Orange	OUT3	Error (N.C.)	
B4	Yellow	OUT4	OFF	
B5	Green	OUT5	OFF	
B6	Blue	OUT6	OFF	
B7	Purple	OUT7	OFF	
B8	Gray	OUT8	OFF	
B9	White	Unused	Unused	Unused
B10	Black	Unused	Unused	

22


IV-H500C/IV-H150M/IV-H500M/IV-H2000M/IV-H500CA/IV-H150MA/IV-H500MA/IV-H2000MA

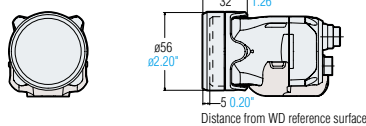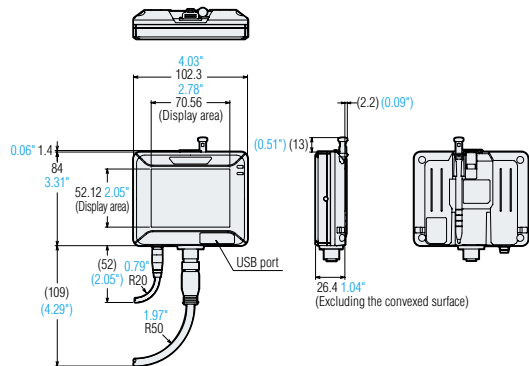Intelligent monitor **IV-M30**

OP-87445 (10 m 32.8')




When NPN is selected in I/O format

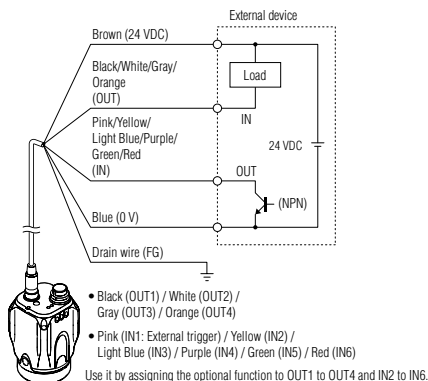[illegible]

- When using dome attachment, please set the target within the range of 0 to 50 mm **0" to 1.97"** from the top.
- Dome attachment can be used for standard distance and close range types.

* When mounted to a support pole 12 mm 0.47" in diameter.

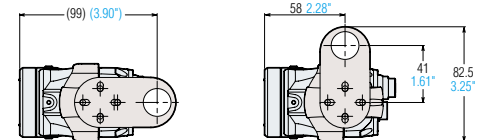

Technical drawings of the 1000W heater unit showing front, side, and top views with dimensions in mm and inches.

- Front View:** Shows a rectangular unit with a width of 107.4 mm (4.21 inches) and a height of 33.8 mm (1.33 inches). Two flexible hoses are connected to the bottom.
- Side View:** Shows the unit's profile with a total height of 35.9 mm (1.41 inches) and a base width of 22.9 mm (0.9 inches).
- Top View:** Shows the unit from above with a width of 57.1 mm (2.25 inches) and a height of 35.9 mm (1.41 inches).

Terminal number and wiring color of the I/O cable for IV-H Series (OP-87440/OP-87441/OP-87442)

Wiring color	Name	Assigning default value	Description
Brown	24 VDC	-	+ side of power
Blue	0 V	-	- side of power GND of input-output cable
Black	OUT1	Total Status (N.O.)	Output assignable function <ul style="list-style-type: none"> • Total Status • Tot. StatusNG • RUN • BUSY • Error • Pos. Adj. • Judge result of each tool (Tool 1 to Tool 16) • Logical operation result of each tool (Tool 1 to Tool 4) • OFF (not used)
White	OUT2	BUSY (N.O.)	
Gray	OUT3	Error (N.C.)	
Orange	OUT4	OFF	
Pink	IN1	External trigger ↑	Set external trigger. Rising timing (↑) or falling timing (↓) can be set.

Wiring color	Name	Assigning default value	Description
Yellow	IN2	OFF	Input assignable function <ul style="list-style-type: none"> • Program bit0 to bit4 • Clear Error • Ext. Master Save • OFF (not used)
Light Blue	IN3	OFF	
Purple	IN4	OFF	
Green	IN5	OFF	
Red	IN6	OFF	
Drain	FG	-	Insulated frame

Cable specification

- Brown/Blue/Black/White/Gray/Orange : AWG25
- Pink/Yellow/Light Blue/Purple/Green/Red : AWG28
- With braided shield cable (with drain cable)

A RICH LINEUP OF VISION SENSORS AND IMAGE PROCESSING EQUIPMENT TO SOLVE A VARIETY OF PROBLEMS

XG Series

OPTIMAL PROBLEM SOLVING CAPABILITY TO MEET A VARIETY OF NEEDS

The XG Series accurately meets all the needs of our customers with its rich lineup of cameras, flexible inspection tools, and diverse operations.



CV-X Series

THE PERFORMANCE OF A HIGH-END MACHINE, NOW EASILY ACCESSIBLE BY ANYONE

This standard model for worldwide use supports 13 languages and provides the user with both optimal problem solving capability and intuitive usability. This is a next-generation image processing sensor designed with the user in mind.



CV-5000 Series

ADVANCED INSPECTION CAPABILITY AND SIMPLE USABILITY

The rich variety of inspection tools (of which there are 19 types available) and the camera variations that support up to 5 megapixels solve all the problems of our customers.



IV-H Series

AFFORDABLE PRESENCE JUDGMENTS

Conventionally, presence inspections required multiple sensors and were difficult to perform, but the IV-H Series can perform these inspections in an easy and affordable manner with a single unit.



KEYENCE

CALL
TOLL
FREE

TO CONTACT YOUR LOCAL OFFICE
1-888-KEYENCE
1 - 8 8 8 - 5 3 9 - 3 6 2 3

www.keyence.com



SAFETY INFORMATION

Please read the instruction manual carefully in order to safely operate any KEYENCE product.

KEYENCE CORPORATION OF AMERICA

Corporate Office 669 River Drive, Suite 403, Elmwood Park, NJ 07407 PHONE: 888-539-3623 FAX: 855-539-0123 E-mail: keyence@keyence.com
Sales & Marketing Head Office 1100 North Arlington Heights Road, Suite 210, Itasca, IL 60143 PHONE: 888-539-3623 FAX: 855-539-0123

AL Birmingham	CA Cupertino	CO Denver	IN Indianapolis	MI Grand Rapids	NJ Elmwood Park	OH Cincinnati	PA Pittsburgh	TX Birmingham	WI Milwaukee
AR Little Rock	CA Irvine	FL Tampa	KY Louisville	MN Minneapolis	NY Rochester	OH Cleveland	SC Greenville	TX Dallas	
AZ Phoenix	CA Los Angeles	GA Atlanta	MA Boston	MO Kansas City	NC Charlotte	OR Portland	TN Knoxville	VA Richmond	
CA N. California	CA San Jose	IL Chicago	MI Detroit	MO St. Louis	NC Raleigh	PA Philadelphia	TN Nashville	WA Seattle	

KEYENCE CANADA INC.

Head Office PHONE: 905-366-7655 FAX: 905-366-1122 E-mail: keyencecanada@keyence.com
Montreal PHONE: 514-694-4740 FAX: 514-694-3206 **Windsor** PHONE: 905-366-7655 FAX: 905-366-1122

KEYENCE MEXICO S.A. DE C.V.

PHONE: +52-55-8850-0100 FAX: +52-81-8220-9097
E-mail: keyencemexico@keyence.com

KA1-1105-2

The information in this publication is based on KEYENCE's internal research/evaluation at the time of release and is subject to change without notice.
Company and product names mentioned in this catalog are trademarks or registered trademarks of their respective companies.
The specifications are expressed in metric units. The English units have been converted from the original metric units.
Copyright (c) 2015 KEYENCE CORPORATION. All rights reserved.

IVH-KA-C-US 1105-2 611A95 Printed in Japan

